


# W2ENY HiFi MIC ELEMENT

Custom Design replaces Heil's BM-10 HC-4 or HC-5 element

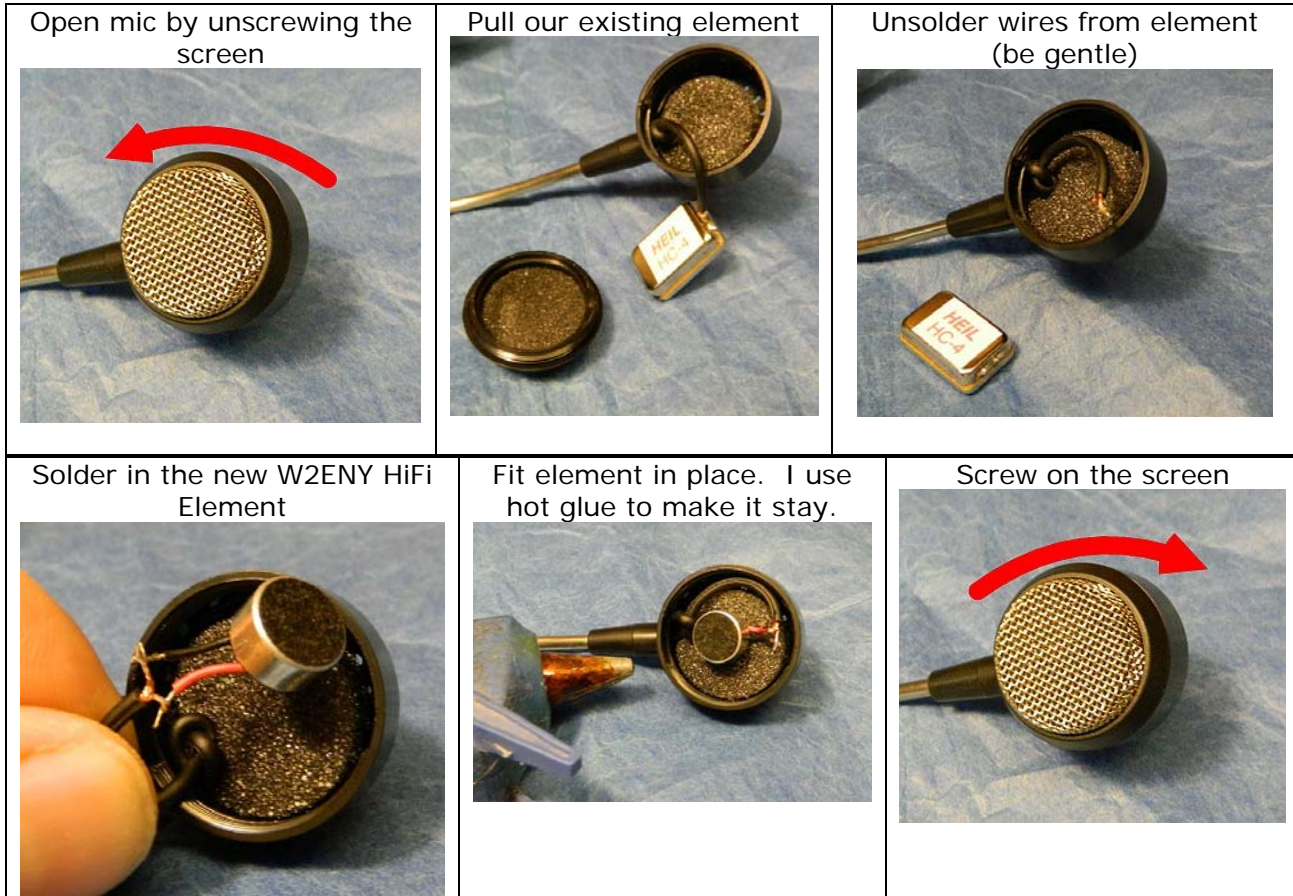

This is an FET amplified electret element, you will have to mod your Heil adapter cable to pass DC to power the element. Here is what you will need to do to the Heil adapter:

Icom – No resistor needed, voltage is already on pin 1

Kenwood – Add resistor from pin 5 to Pin 1

Yaesu – Add resistor from pin 2 to Pin 8

Elecraft – Add resistor from pin 6 to pin 1

*(Elecraft radios are configurable, your radio may be configured different)*

TenTec 4 pin -Add resistor from pin 4 to Pin 1

TenTec 8 pin - Add resistor from pin 2 to Pin 8

